



Reusable plastic trays, bulk boxes, pallets & dollies for short or long term rental



## Hygiene Pallet TC3-5

**Strong, tough and very hygienic**

The 1200 x 1000mm Logtek TC3-5 Hygiene Pallet is ideal for the storage, handling and distribution of food, pharmaceuticals and other products where cleanliness and hygiene are important.

The TC3-5 pallet safely racks loads of up to 1,250 Kg and is suitable for freezing down to -30°C. Smooth surfaces minimise dirt traps and facilitate fast and thorough cleaning.

A 7mm rim retains Euro size (600 x 400mm) containers. Wide width fork entry provides fast and safe access to fork lifts, while curved-profile runners allow smooth access for pallet truck rollers.

Unlike timber pallets, there are no splinters or metal shards that could damage contents or injure personnel. Plastic pallets have a constant tare and do not absorb moisture or contaminants.


Although initially more expensive than wood, plastic pallets can save money through longevity and by virtually eliminating repair and maintenance costs.



Rental allows you to acquire what you need, when you need it. Logtek's large fleet of trays, bulk boxes, pallets and wheeled dollies ensures our customers meet day to day needs with the flexibility to address peak or seasonal demands.



# TC3-5 Pallet technical specification

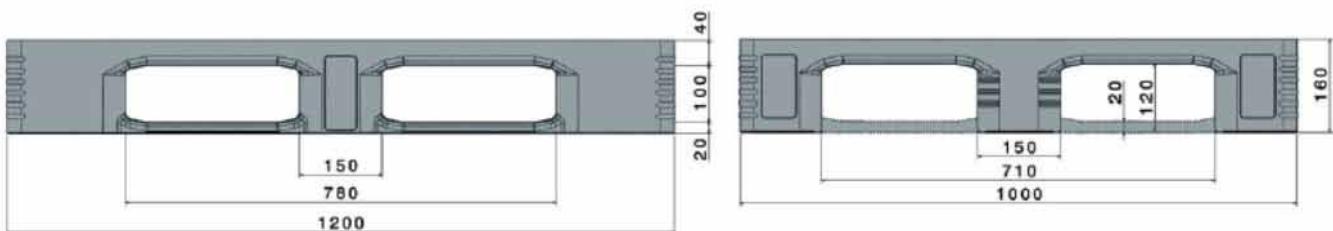

## TC3-5 1200 x 1000mm pallet specification

Description: Smooth 1200 x 1000mm UK standard size pallet with 5 integral runners

Dimensions: 1200 x 1000 x 160mm

Weight: 22.5 Kg

Temperature range: -30°C to +40°C (briefly up to +90°C for washing)

Loading - Static: 7,500 Kg (on flat level ground)\*

- Dynamic: 1,500 Kg (on forklift or conveyor)\*

- on Racking: 1,250 Kg (supported by two racking beams)\*

\*carrying a uniformly distributed load at ambient temperature

## Operating instructions

Loading figures refer to a uniformly distributed load (UDL). Beware of concentrating the load on one area (point loading) particularly if the pallet is to be stored on racking beams.

Pallets should only be stacked on a flat level surface. Stability is vital when block stacking; make sure that the top of each pallet load is level, secure and capable of supporting the load above.

On racking there should be an even overhang front and back.

TC3-5 pallets can be accessed by fork lift from all four sides. When using pallet 'pump' trucks, care should be taken that the truck wheels are not resting on the pallet runners when lifting as this can damage the runners.



## **Logtek Limited**

7 Ridgeway, Quinton Business Park,  
Birmingham B32 1AF

Tel: +44 (0)121 506 0118

[info@logtek.com](mailto:info@logtek.com)

[www.logtek.com](http://www.logtek.com)