



Reusable plastic trays, bulk boxes, pallets
& dollies for short or long term rental



Pooling Pallet CR3-5

Strong, ventilated with Anti-slip protection

The 1200 x 1000mm Logtek CR3-5 Pooling Pallet is ideal for the storage, handling and distribution of food, pharmaceuticals and other products where cleanliness and hygiene are important.

The ventilated deck promotes air circulation, for faster cooling in fridges & freezers. It is also ideal for sprinkler penetration in case of fire.


The TC3-5 pallet safely racks loads of up to 1,000 Kg and is suitable for freezing down to -30°C.

The anti-slip strips combined with a 5mm rim help to retain loads. Wide width fork entry provides fast and safe access to fork lifts, while curved-profile runners allow smooth access for pallet truck rollers.


Unlike timber pallets, there are no splinters or metal shards that could damage contents or injure personnel. Plastic pallets have a constant tare and do not absorb moisture or contaminants.

Although initially more expensive than wood, plastic pallets can save money through longevity and by virtually eliminating repair and maintenance costs.

Rental allows you to acquire what you need, when you need it. Logtek's large fleet of trays, bulk boxes, pallets and wheeled dollies ensures our customers meet day to day needs with the flexibility to address peak or seasonal demands.



CR3-5 Pallet *technical specification*

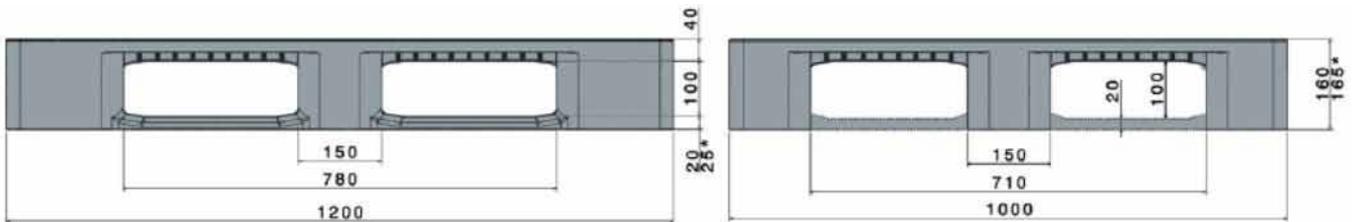

CR3-5 1200 x 1000mm pallet specification

Description:	Smooth 1200 x 1000mm UK standard size pallet with 5 integral runners
Dimensions:	1200 x 1000 x 160mm
Weight:	23.5 Kg
Temperature range:	-30°C to +40°C (briefly up to +90°C for washing)
Loading - Static:	5,000 Kg (on flat level ground)*
- Dynamic:	1,250 Kg (on forklift or conveyor)*
- on Racking:	1,000 Kg (supported by two racking beams)*

*carrying a uniformly distributed load at ambient temperature

Operating instructions

Loading figures refer to a uniformly distributed load (UDL). Beware of concentrating the load on one area (point loading) particularly if the pallet is to be stored on racking beams.

Pallets should only be stacked on a flat level surface. Stability is vital when block stacking; make sure that the top of each pallet load is level, secure and capable of supporting the load above.

On racking there should be an even overhang front and back.

TC3-5 pallets can be accessed by fork lift from all four sides. When using pallet 'pump' trucks, care should be taken that the truck wheels are not resting on the pallet runners when lifting as this can damage the runners.



Logtek Limited

7 Ridgeway, Quinton Business Park,
Birmingham B32 1AF

Tel: +44 (0)121 506 0118

info@logtek.com

www.logtek.com